


# microPARADE 12 24 36 EASY | outdoor use

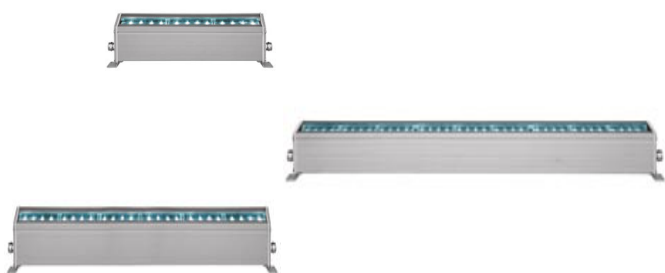

## EASY EDITION

Featuring 12, 24 or 36 cold or warm colour temperature white LEDs, as well as a wide choice of monochromatic tones, microPARADE EASY comes with a light weight competitive price for budget restraint projects where DMX, colour changing and dimming options are not specified.

Disponibili con 12, 24 o 36 LED bianchi a temperatura colore calda o fredda, oltre che in una vasta gamma di tonalità monocromatiche a scelta, i microPARADE EASY sono caratterizzati da un prezzo competitivo per progetti a budget contenuto che non richiedono opzioni DMX, dimmer e cambio colore.

### CODES / CODICI

AL4440 microPARADE 12 EASY  
AL4441 microPARADE 24 EASY  
AL4442 microPARADE 36 EASY

### CODES EXTENSION / ESTENSIONE CODICI

AL4440	EL	CW
CODE + CODICE	OPTICS + OTTICA	LED TYPE TIPO DI LED

### OPTICS / OTTICA

**EL** Elliptical / Ellittica  
**WW** Wall Wash / Wall Wash

### LED TYPE / TIPO DI LED

**CW** Cold white / Bianco freddo  
**WW** Warm white / Bianco caldo

PHOTOMETRIC DETAILS  
AVAILABLE ON OUR WEBSITE

DATI FOTOMETRICI DISPONIBILI  
SUL NOSTRO SITO

### TECHNICAL SPECIFICATIONS

12, 24 or 36 high brightness cold or warm white (monochrome on request) power LEDs unit  
Power supply: standard 100÷240V / 50-60Hz  
Power consumption:  
microPARADE 12 EASY: 0.11A @ 230V / 11W ca.  
microPARADE 24 EASY: 0.17A @ 230V / 19W ca.  
microPARADE 36 EASY: 0.23A @ 230V / 28W ca.  
Electrical class: I  
Self-resetting fuse protection  
Integrated electronic thermal protection management  
Meets CE safety standards  
Extruded aluminium body  
IP67  
Operating temperature: -20°C to 50°C (-4°F to 122°F)  
microPARADE 12 EASY: 1.3 Kg  
microPARADE 24 EASY: 2.2 Kg  
microPARADE 36 EASY: 2.7 Kg

### SPECIFICHE TECNICHE

Barra modulare con 12, 24 o 36 LED di potenza bianchi (monocromatici su richiesta)  
Alimentazione: standard 100÷240V / 50-60Hz  
Consumo:  
microPARADE 12 EASY: 0,11A @ 230V / 11W ca.  
microPARADE 24 EASY: 0,17A @ 230V / 19W ca.  
microPARADE 36 EASY: 0,23A @ 230V / 28W ca.  
Classe elettrica: I  
Fusibile di protezione auto-ripristinante  
Protezione termica con controllo elettronico integrato  
Rispetta le norme CE  
Corpo proiettore in alluminio estruso  
IP67  
Temperatura di utilizzo: da -20°C a 50°C  
microPARADE 12 EASY: 1,3 Kg  
microPARADE 24 EASY: 2,2 Kg  
microPARADE 36 EASY: 2,7 Kg


WW

CW

EASY

### ACCESSORIES / ACCESSORI


IP67 / IK06 / CE



AL4418 LINE END CAP



AL4463 POWER CABLE

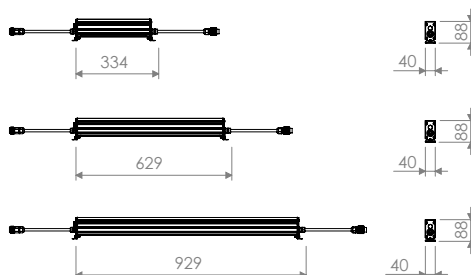

THE OUTDOOR LED DIMENSION

GRIVEN